



Specialist for Pumping Technology



HQ

**Standard Vertical Circulator
Multistage Pump**

+75 years developing the pumping technology that drives progress

The HQ vertical pump consist of a bowl assembly, single stage or multistage, suspended on a column and/or discharge head. The length of the column is determined by the application. Vertical wet pit pumps of bowl construction have certain inherent advantages over all other pump types:


- 1 They can be designed with high efficiency over the entire specific speed range, with specific speed indicating the desired flow to head ratio.
- 2 The available net positive suction head at the first stage impeller can be increased by increasing the pump lengt (lowering).
- 3 The pump, is self-aligning in that all critical flanged joints have mating male and female rabbit fits.

Qualified specialists in all departments ensure that the pumps and equipment from our facilities are able to operate under the most arduous conditions. Intensive research and development ensures that the products of Ruhrpumpen are continuously improved to meet the latest technical requirements.

It is only possible to achieve these aims by means of highly sophisticated CNC controlled machines in our modern machine shop, supplemented by our test and development departments well as the latest industry standard inspection and control procedures.

All in our ISO 9001 certified facilities. The application of modern, reliable methods data processing and sophisticated software with high performance, state of the art IT offers our customers high reliability and speed in all working processes, from planning to production through to the providing of spare parts.

The instant availability of spare parts, together with first class service, ensures customer that they have selected the right partner.

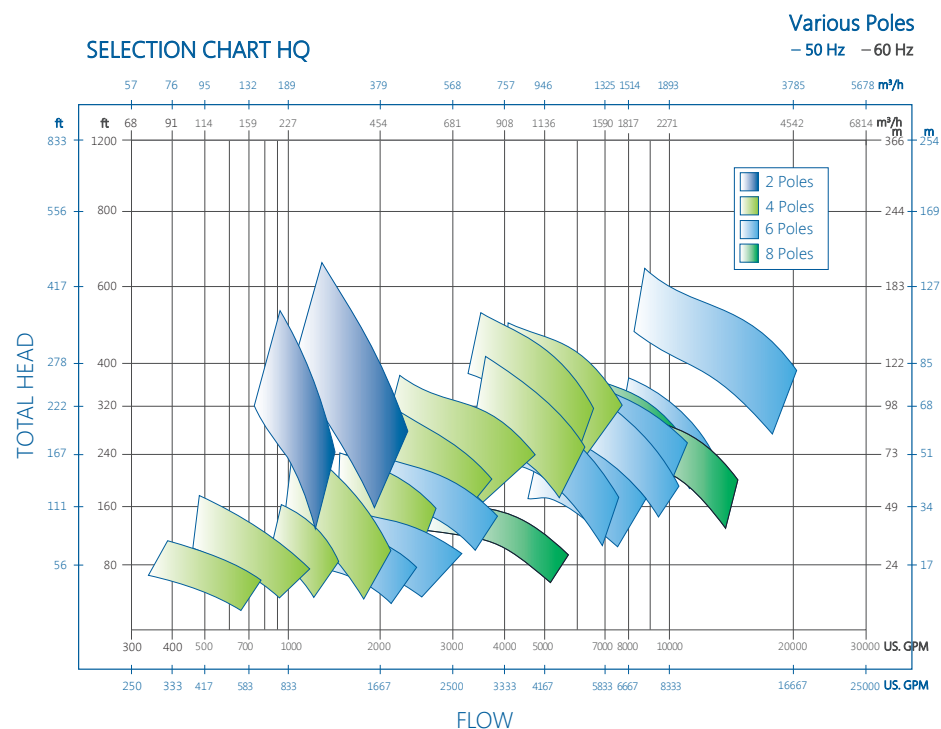

Ruhrpumpen is your single source supplier


- Original Equipment
- Spare parts
- Installation and startup support
- Repair and maintenance
- Engineering, training and consulting
- Reverse engineering

Benefits of our pumps

- Proven reliability
- High efficiency designs ensure lowest operating cost
- Robust design allows for long system life with minimal maintenance
- Optimized total cost of ownership



Characteristics

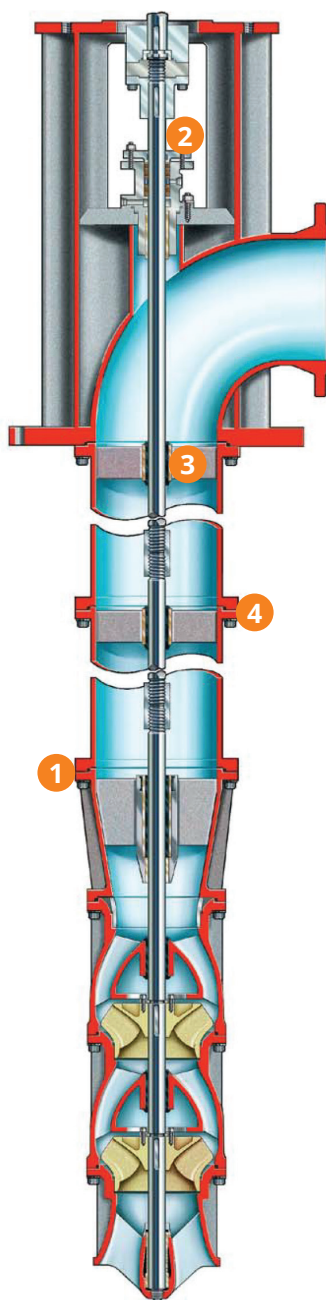

HQ PERFORMANCE DATA

Capacity	up to 5,675 m ³ /h	up to 25,000 gpm
Head	up to 175 m	up to 575 ft
Pressure	up to 17 atm	up to 250 psi
Temperature	up to 135°C	up to 275°F
Horsepower	up to 2,000 hp	

Notes:

For pump operations outside this range, please contact a Ruhrpumpen Representative.

DESCRIPTION

- No leaking. "O" ring or gaskets throughout allow metal to metal rabbet fits between all components.
- Easier motor installation. Vertical solid shaft or hollow shaft motor couplings can be supplied.
- Capacities to 25,000 GPM from stock components. Many parts are stock to support the shortest possible delivery schedule.
- Less downtime. Achieved through improved alignment and reduced shaft run-out using integrally fabricated spider construction.
- Assured Fabrication Quality. All pumps fabricated by Ruhrpumpen use ASME Section IX welding procedures and qualified welders. Every weld is stamped.
- Stable operating characteristics. Continually rising head capacity curve from run-out to shut-off; non-overloading horsepower curve from minimum flow to run-out.
- Reduced sump construction costs. The combination of the excellent NPSH characteristics, minimum submergence requirements and Ruhrpumpen's unique design reduces overall cost.
- Easier installation. Due to size, all HQ columns are flanged for better handling. Through bolts are standard.

DESIGN FEATURES

- Pumps fabricated using ASME Section IX welding procedures and qualified welders with welds stamped for quality control.
- All metal-to-metal rabbet fits sealed with O-rings or gaskets.
- Continually rising head capacity curve from maximum flow to shut off.
- Non-overloading horsepower curve from best efficiency flow to maximum flow.
- Head room for motor removal minimized by use of vertical solid shaft coupling construction.
- Integrally fabricated bearing spider construction on 5-foot maximum spacing between bearings.

BROAD APPLICATION RANGE

- Fresh water, sea water, waste water, and effluent applications.
- Hydrocarbons and chemicals.
- Cooling tower.
- Pipeline service
- General industrial service.

+75 years creating the pumping technology that moves our world

Ruhrpumpen is an innovative and efficient pump technology company that offers highly-engineered and standard pumping solutions for the oil & gas, power generation, industrial, water and chemical markets. We offer a broad range of centrifugal and reciprocating pumps that meet and exceed the requirements of the most demanding quality specifications and industry standards such as API, ANSI, UL, FM, ISO and Hydraulic Institute.



Ruhrpumpen Plants

-  ARGENTINA, Buenos Aires
-  BRAZIL, Rio de Janeiro
-  CHINA, Changzhou
-  EGYPT, Suez
-  GERMANY, Witten
-  INDIA, Chennai
-  MEXICO, Monterrey
-  UK, Lancing
-  USA, Tulsa

-  Manufacturing plant & service center
-  Service center